

TexWalk®

**Wide-format indoor
and outdoor graphics**

- 14 mil PVC vinyl
- Scrim reinforced; dimensionally stable
- Removable/repositionable adhesive
- Adheres to multiple surfaces
- Compatible with low & no VOC paints
- No overlamine required

Application Ideas:

- Tradeshows
- POS/retail promotions
- Universities/colleges/K-12 schools
- Health & Welfare messaging
- Wayfinding, instructional messages
- Interior wall décor
- Corporate events and more!

TexWalk® applies to


- Carpet
- Tile
- Wood
- Metal
- Painted Surfaces
- PVC floors



Printable with UV inkjet,
latex, solvent, eco-solvent.

Print n'Go Media™ No laminate required

The Magic is in the Material

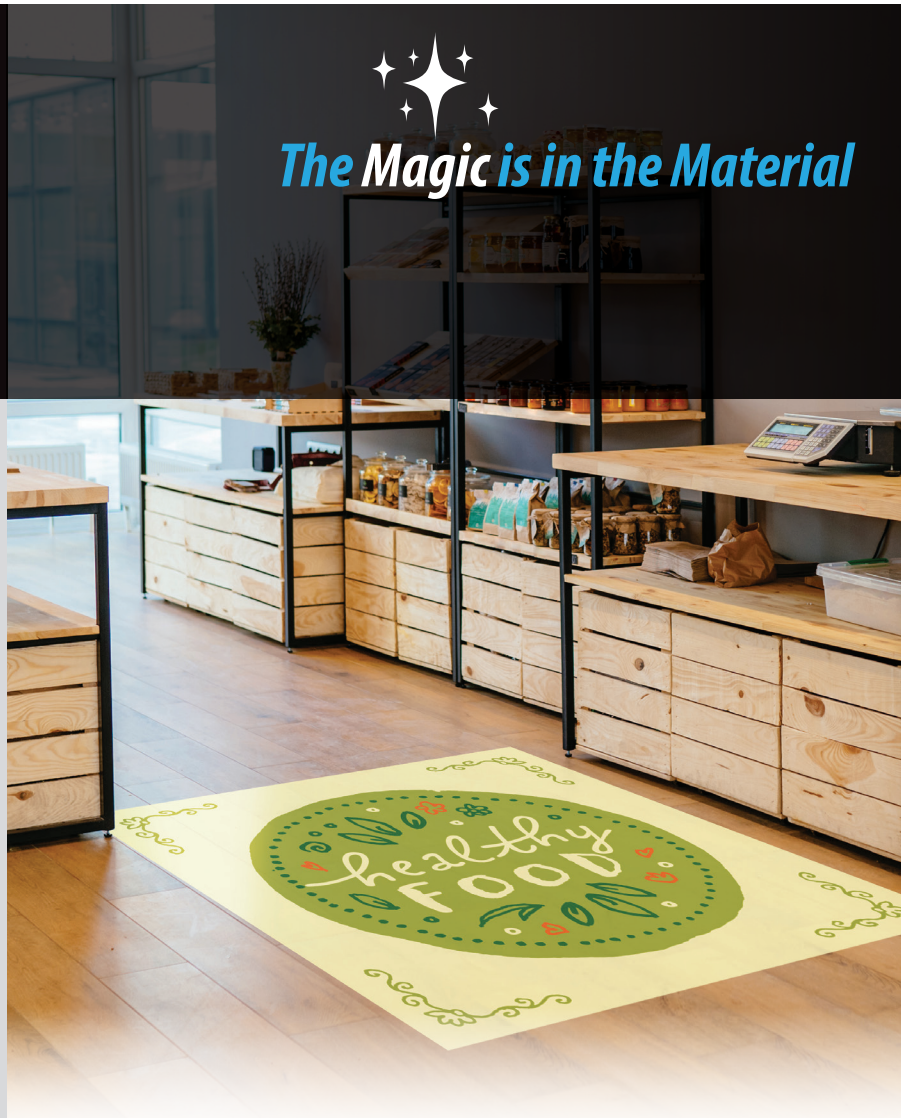

J JESSUP®
Adhesive Coated Films

jessupmfg.com

TexWalk®

Sizes:


- Floor01-T-3 (23" x 10')
- Floor01-T (48" x 82')
- Floor01-T-D (48" x 164')

Duration:

- Indoor floors: 3 months
- Indoor walls: 24-36 months
- Outdoor use: 1-3 months

Certifications:

- Fire: ASTM E84 Class A
- Non-slip: ASTM-D2047
- UL 410
- Wall Covering:
CCC-W-408D Type 1

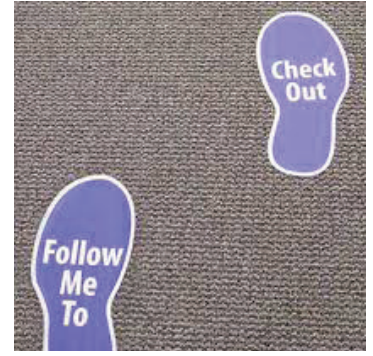

PHYSICAL PROPERTIES	TEST METHODS	AVERAGE RESULTS
Thickness	PSTC - 133 - Substrate - Pressure Sensitive adhesive - Release Liner	0.012 inch (0.305 mm) 0.002 inch (0.051 mm) 0.005 inch (0.127 mm)
Peel Adhesion to:	PSTC - 101	
- Stainless Steel	15 minute dwell 24 hour dwell	14 oz/in (15 N/100 mm) 20 oz/in (22 N/100 mm)
- Powder coated surfaces *	15 minute dwell 24 hour dwell	18 oz/in (20 N/100 mm) 25 oz/in (28 N/100 mm)
- Polyethylene	15 minute dwell 24 hour dwell	15 oz/in (17 N/100 mm) 18 oz/in (20 N/100 mm)
Shear Adhesion to:	PSTC - 107	
- Stainless Steel	1/2" x 1/2" x 1000g	< 1 hour
Tack	PSTC - 6 Rolling Ball Tack	< 2 inches

Note: While the data contained herein is believed to be reliable averages of the product's properties, the data should not be used for specification purposes. Color and lot variances of carpet and coated surfaces including paints, powder coatings, lacquers, stains, and other treatments may vary the performance and should be evaluated for the compatibility of the tape to the specific surface.



Jessup Manufacturing Company

©2022 Jessup • MKT-JMC-PocketTXWK

jessupmfg.com